




2329 Alger • Troy, MI 48083
 800.482.3400 • FAX 248.457.1140
www.poseidonwetcleaning.com






ED260

ED-SERIES 30-POUND CAPACITY
 WETCLEANING ECO DRYER


Capacity <i>lbs (kg)</i>	30 (13.6)
Cylinder Volume <i>cu ft (dm³)</i>	9.2 (260)
Cylinder Diameter <i>inch (mm)</i>	29 (736)
Cylinder Depth <i>inch (mm)</i>	24.1 (612)
Net Weight <i>lbs (kg)</i>	549 (249)
Crated Weight <i>lbs (kg)</i>	593 (269)
Machine Width <i>inch (mm)</i>	31.4 (798)
Machine Depth <i>inch (mm)</i>	38.8 (985)
Machine Height <i>inch (mm)</i>	
Gas/Electric	59.9 (1522)
Steam	61.1 (1553)
Door Opening <i>inch (mm)</i>	22 (559)
Floor to Door <i>inch (mm)</i>	22.5 (570)
Shipping Dimensions <i>inch (mm)</i>	32.5 x 43 x 66.1
<i>(WxDxH)</i>	<i>(826 x 1092 x 1680)</i>
Drum Motor Power <i>Hp (kW)</i>	0.54 (0.40)
Extraction Motor Power <i>Hp (kW)</i>	0.34 (0.25)
Exhaust Diameter <i>inch (mm)</i>	6.3 (160)
Exhaust Air Flow <i>cfm (l/s)</i>	391.4 (185)
Electric Heating <i>kW (m³/h)</i>	12.3 (665)
Gas Connection <i>inch (mm)</i>	1/2 NPT (12.7)
Gas Heating <i>BTU/h (Kcal/h)</i>	70,480 (17,773)
Steam Connection <i>inch (mm)</i>	
Inlet	1/2 NPT (12.7)
Outlet	1/2 NPT (12.7)
Steam Heating <i>BTU/h (kW)</i>	
at 130 PSI (9 bar)	68,003 (19.9)
BHP Consumption <i>BHP</i>	
at 130 PSI (9 bar)	1.62
Available Voltages/Wire Conductor/Amp (Rev Amp)	
Gas/Steam	200-240/60/1, 2W + G, 6 200-240/60/3, 3W + G, 6 200-240/50/1, 2W + G, 6 380-415/60/3, 4W + G, 6
Electric	200-240/60/3, 3W + G, 40 380-415/60/1, 4W + G, 25

* Specifications subject to change without notice or obligation. Call Poseidon Textile Care for dimensions not shown or for clarification.

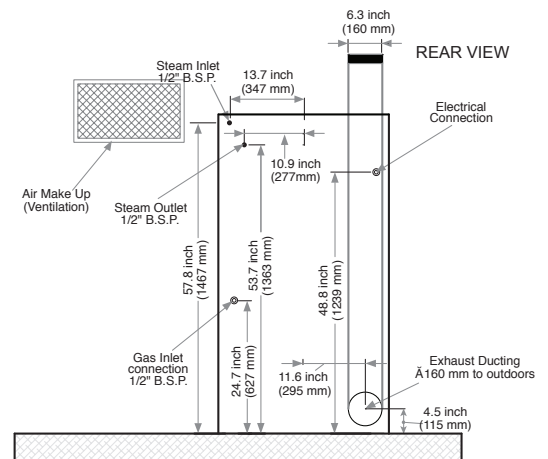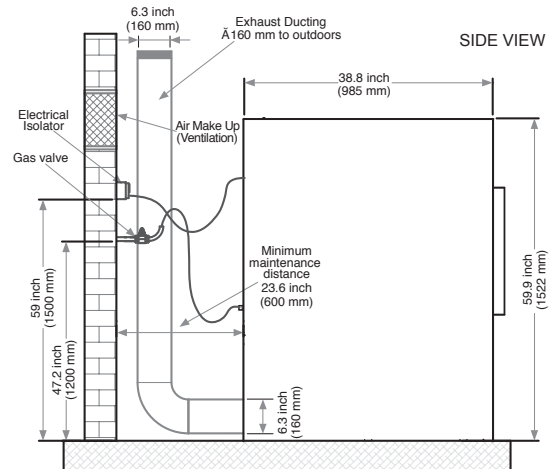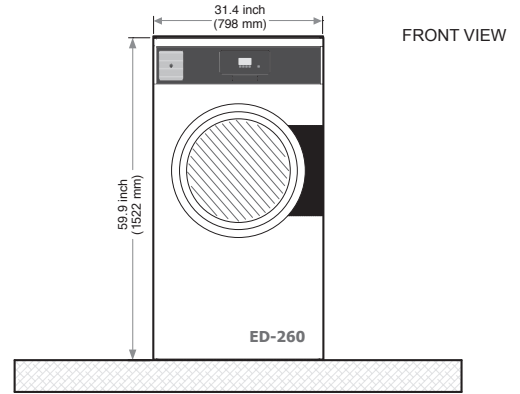



2329 Alger • Troy, MI 48083
 800.482.3400 • FAX 248.457.1140
www.poseidonwetcleaning.com



ED340

ED-SERIES 40-POUND CAPACITY
 WETCLEANING ECO DRYER

Capacity <i>lbs (kg)</i>	40 (18.1)
Cylinder Volume <i>cu ft (dm³)</i>	12 (340)
Cylinder Diameter <i>inch (mm)</i>	29 (736)
Cylinder Depth <i>inch (mm)</i>	31.5 (800)
Net Weight <i>lbs (kg)</i>	616 (279)
Crated Weight <i>lbs (kg)</i>	660 (299)
Machine Width <i>inch (mm)</i>	31.4 (798)
Machine Depth <i>inch (mm)</i>	46.2 (1173)
Machine Height <i>inch (mm)</i>	
Gas/Electric	59.9 (1522)
Steam	61.1 (1553)
Door Opening <i>inch (mm)</i>	22 (559)
Floor to Door <i>inch (mm)</i>	22.4 (570)
Shipping Dimensions <i>inch (mm)</i>	32.5 x 50.4 x 66.1
(WxDxH)	(826 x 1280 x 1680)
Drum Motor Power <i>Hp (kW)</i>	0.6 (0.45)
Extraction Motor Power <i>Hp (kW)</i>	0.34 (0.25)
Exhaust Diameter <i>inch (mm)</i>	6.3 (160)
Exhaust Air Flow <i>cfm (l/s)</i>	410 (193)
Electric Heating <i>kW (m³/h)</i>	18
Gas Connection <i>inch (mm)</i>	1/2 NPT (12.7)
Gas Heating <i>BTU/h (Kcal/h)</i>	79,575 (20,065)
Steam Connection <i>inch (mm)</i>	
Inlet	1/2 NPT (12.7)
Outlet	1/2 NPT (12.7)
Steam Heating <i>BTU/h (kW)</i>	
at 130 PSI (9 bar)	70,324 (20.6)
BHP Consumption <i>BHP</i>	
at 130 PSI (9 bar)	1.68
Available Voltages/Wire Conductor/Amp (Rev Amp)	
Gas/Steam	200-240/60/1, 2W + G, 6 200-240/60/3, 3W + G, 6 200-240/50/1, 2W + G, 6 380-415/60/3, 4W + G, 6
Electric	200-240/60/3, 3W + G, 53 380-415/60/3, 4W + G, 40

* Specifications subject to change without notice or obligation. Call Poseidon Textile Care for dimensions not shown or for clarification.

